

PhlatLight[®] LED Development Kit Product Brief


DK-314N Series

Overview

The DK-314N development kits for PhlatLight products are comprehensive solutions designed specifically to allow for evaluation of products in minutes. The kits are a complete solution including high-current drivers optimized for each device and an efficient thermal management infrastructure to ensure the devices can be operated at their optimum point, whether it is for maximum brightness, maximum efficiency or somewhere in-between. This plug and play solution can easily be connected to standard laboratory equipment through standard connectors and allows system designers to save weeks in their development cycles.

Key Features

- DK-314N series kits are optimized for CBM-290-RGB devices.
- Capable of driving all colors simultaneously.
- Driver board supply currents of 14A.

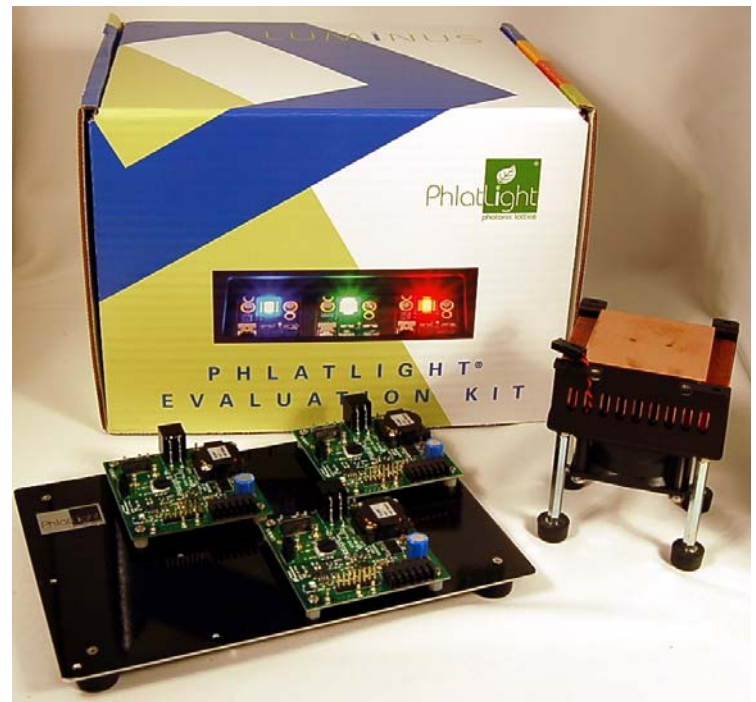

Main Features

- Can be operated either in pulsed or continuous waveform (CW) modes
- Static current control via on board dial knob
- Pulse width modulation input supports pulsed mode operation with duty cycles ranging from 0% - 100%
- Optional dynamic current control by user-supplied external device.
- Pulse frequencies greater than 40kHz supported
- Fast rise and fall times - less than 1 microsecond
- Fast current level switching - less than 5 microseconds
- Typical thermal resistance of 0.3°C/W from heat sink to ambient
- Grounded common anode configuration - no electrical isolation between multiple devices is required.
- Driver circuitry based off of National LM3433 IC

Development Kit Contents

- 3 driver cards optimized for the device evaluated
- 1 high performance air-cooled heat sink.
- Electrical wiring between driver and PhlatLight devices
- Breakout cable for interface between LEDs, drivers and user supplied components.
- Thermal interface materials and mounting hardware
- User manual including step-by-step instructions for set-up and operation of the kit.

User equipment Required

- Standard 12V laboratory power supply.
- Standard instrumentation - volt meter, oscilloscope.
- Pulse generator for PWM dimming.
- Optional dynamic current management solution

Note: PhlatLight LED products are not included in the development kits and must be purchased separately.

Product Compatibility

| Development Kit Part Number | Compatible PhlatLight LEDs |
|-----------------------------|----------------------------|
| DK-314N-3 | CBM-290-RGB |

Ordering Information

| Ordering Part Number | Product | Description |
|----------------------|----------------------------------------------------|----------------------------------------------------------------------------------------------------|
| DK-314N-3 | DK-314N PhlatLight Development Kit, triple channel | Triple channel development kit, with 14A driver board, heat sink, cable assemblies and user manual |

The products, their specifications and other information appearing in this document are subject to change by Luminus Devices without notice. Luminus Devices assumes no liability for errors that may appear in this document, and no liability otherwise arising from the application or use of the product or information contained herein. None of the information provided herein should be considered to be a representation of the fitness or suitability of the product for any particular application or as any other form of warranty. Luminus Devices' product warranties are limited to only such warranties as accompany a purchase contract or purchase order for such products. Nothing herein is to be construed as constituting an additional warranty. No information contained in this publication may be considered as a waiver by Luminus Devices of any intellectual property rights that Luminus Devices may have in such information. PhlatLight® is a registered trademark of Luminus Devices, Inc., all rights reserved.

Luminus Devices
1100 Technology Park Drive
Billerica, MA 01821

978-528-8000 (T)
978-528-8001 (F)

E-mail: sales@luminus.com

www.luminus.com